
C1GN1

1.755 to 2.400 GHz Drop-in Circulator

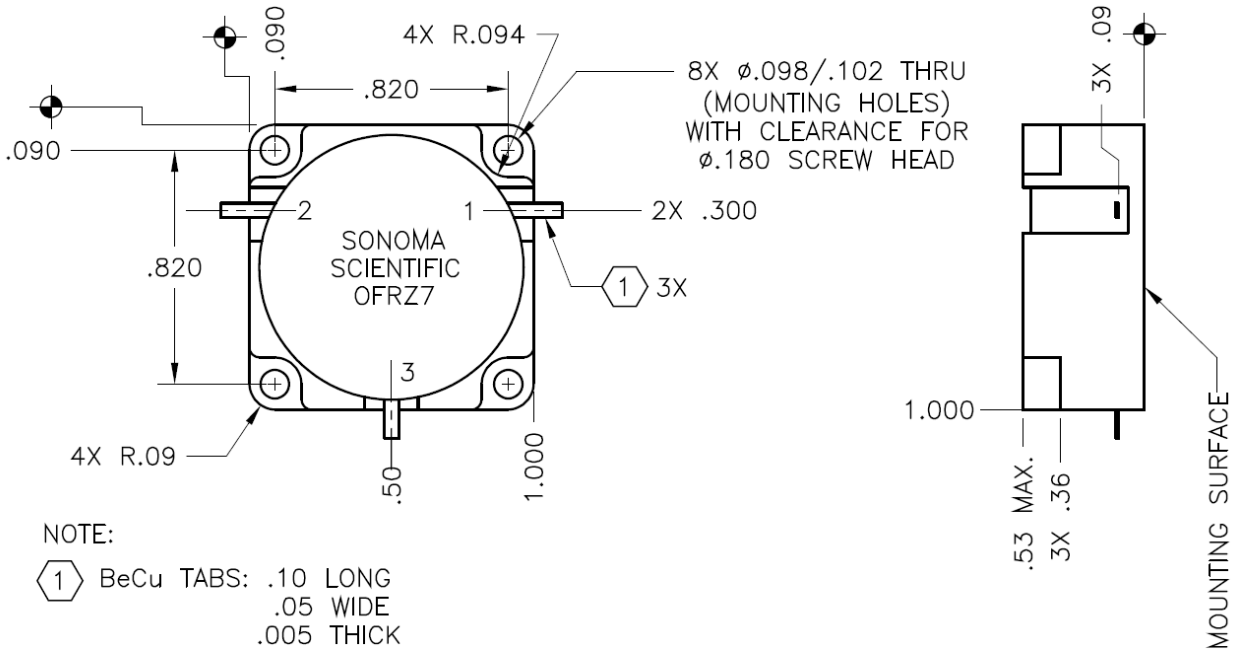

Electrical Specifications	
Frequency	1.755 – 1.850 GHz and 2.200 – 2.400 GHz
Isolation (Min)	18 dB
Insertion Loss (Max)	0.35 dB
VSWR (Max)	1.30:1
Forward Power Handling	250 W
Reverse Power Handling	250 W
Operating Temperature	-10 °C to +75 °C
Direction of Rotation	Counterclockwise

Mechanical Specifications	
Size	1.00 x 1.000 x 0.53 in
Connector Type	Tabs
Connector Configuration	Copper
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .01, .xxx ± .005

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA