
E3XB2

3.5 to 12.8 GHz Connectorized Edgeguide

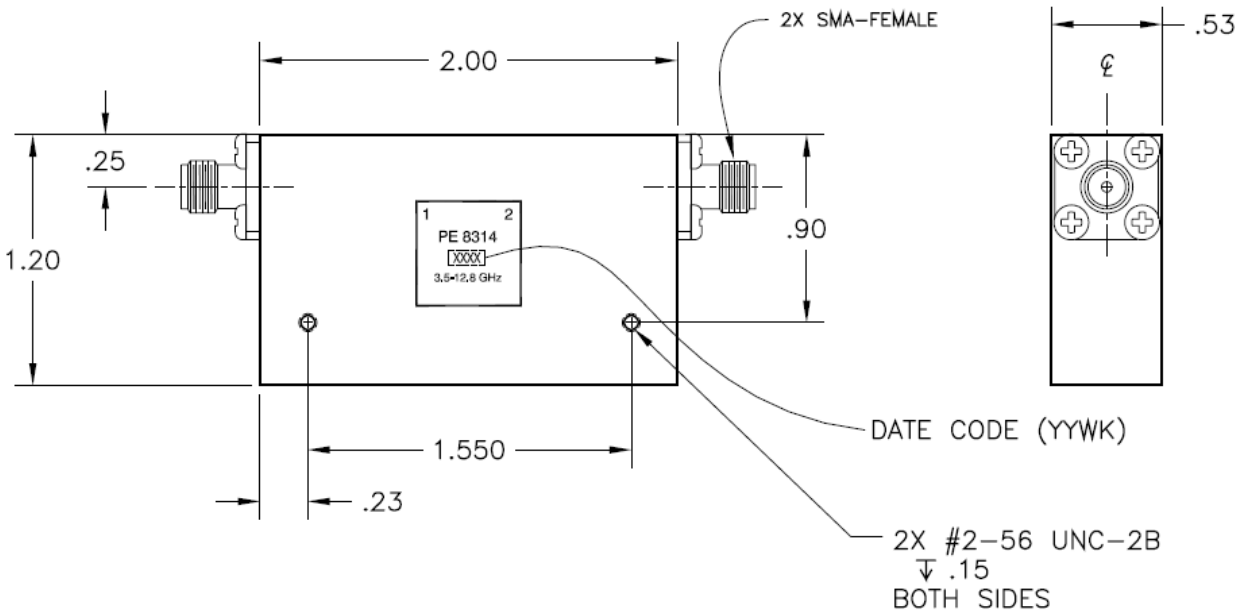

Electrical Specifications	
Frequency	3.5 – 12.8 GHz
Isolation (Min)	17 dB
Insertion Loss (Max)	1.4 dB
VSWR (Max)	1.50:1
Forward Power Handling	10 W
Reverse Power Handling	10 W
Operating Temperature	-20 °C to +65 °C
Direction of Rotation	Clockwise

Mechanical Specifications	
Size	2.00 x 1.20 x 0.53 in
Connector Type	Connectorized
Connector Configuration	SMA Female
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .01, .xxx ± .005

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA