
T6XD3

6.0 to 18.0 GHz Connectorized Isolator

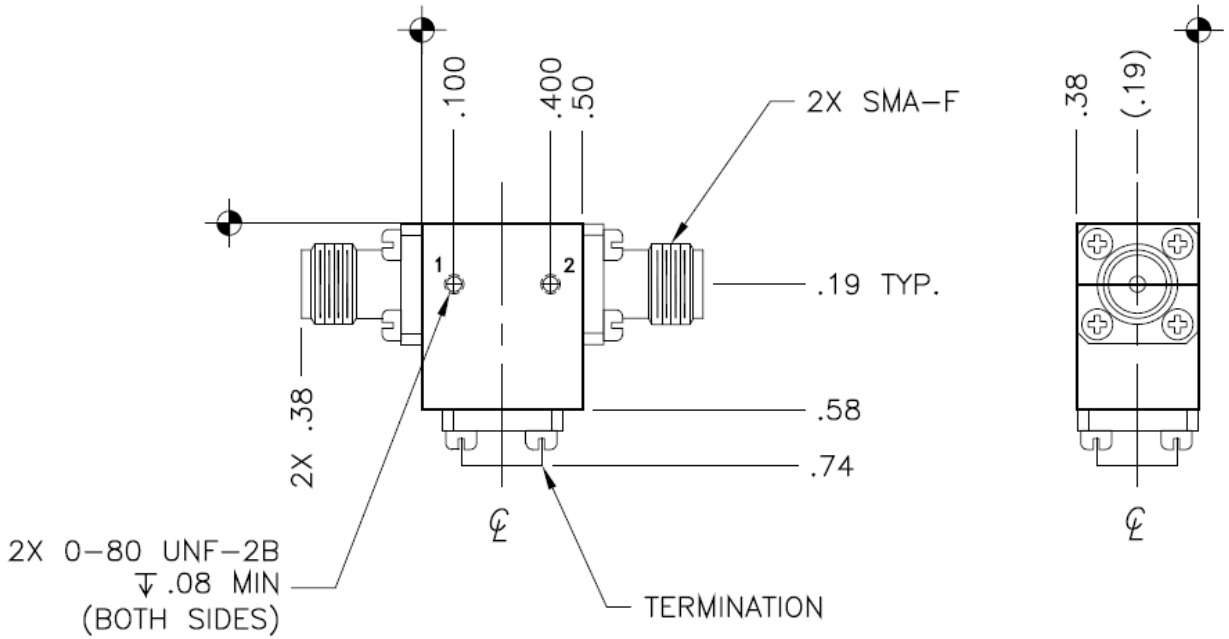

Electrical Specifications	
Frequency	6.0 – 18.0 GHz
Isolation (Min)	13 dB
Insertion Loss (Max)	1.1 dB
VSWR (Max)	1.60:1
Forward Power Handling	10 W
Reverse Power Handling	1 W
Operating Temperature	-54 °C to +85 °C
Direction of Rotation	Clockwise

Mechanical Specifications	
Size	0.50 x 0.58 x 0.38 in
Connector Type	Connectorized
Connector Configuration	SMA
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .02, .xxx ± .010

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA