
C8ZC1

8.0 to 10.0 GHz Drop-in Circulator

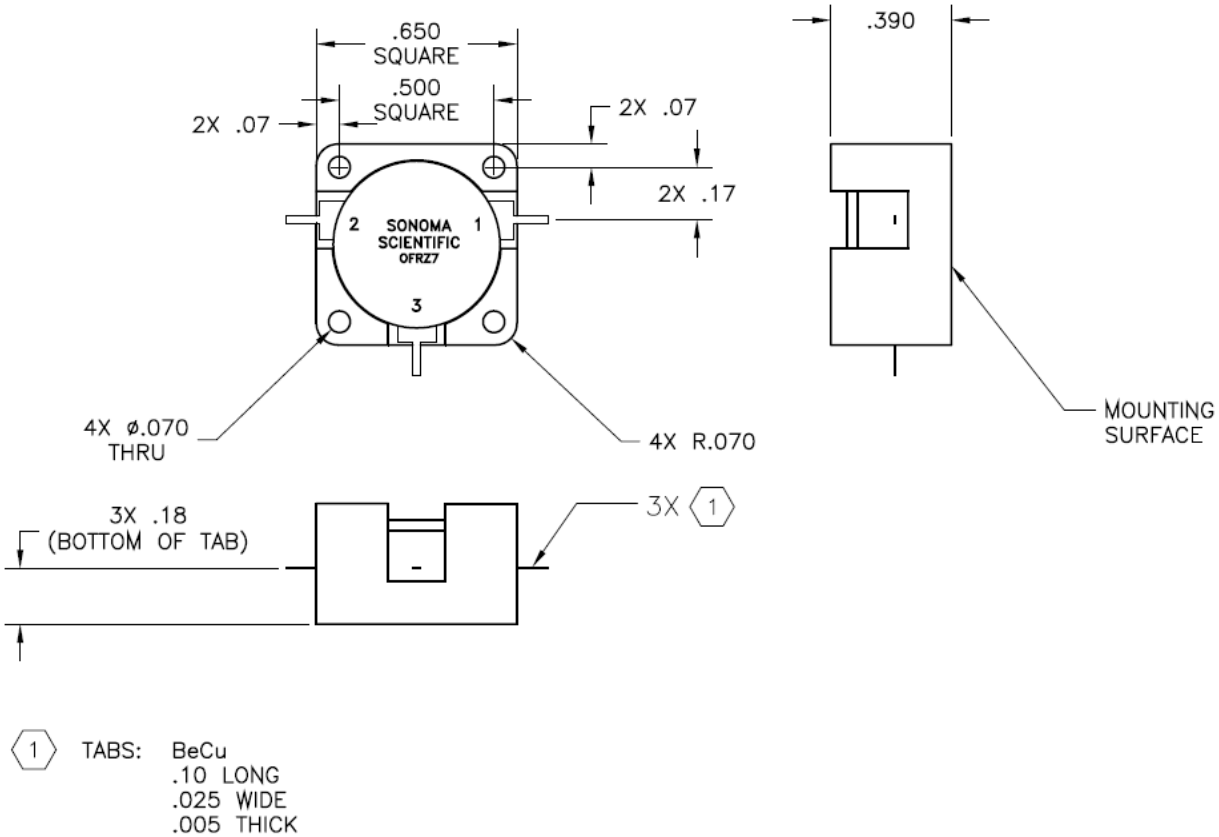

Electrical Specifications	
Frequency	8.0 – 10.0 GHz
Isolation (Min)	15 dB
Insertion Loss (Max)	0.4 dB
VSWR (Max)	1.35:1
Forward Power Handling	100 W
Reverse Power Handling	100 W
Operating Temperature	-40 °C to +85 °C
Direction of Rotation	Counterclockwise

Mechanical Specifications	
Size	0.650 x 0.650 x 0.390 in
Connector Type	Tabs
Connector Configuration	Copper
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .03, .xxx ± .010

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA