
C1AT2

1.02 to 1.10 GHz Drop-in Circulator

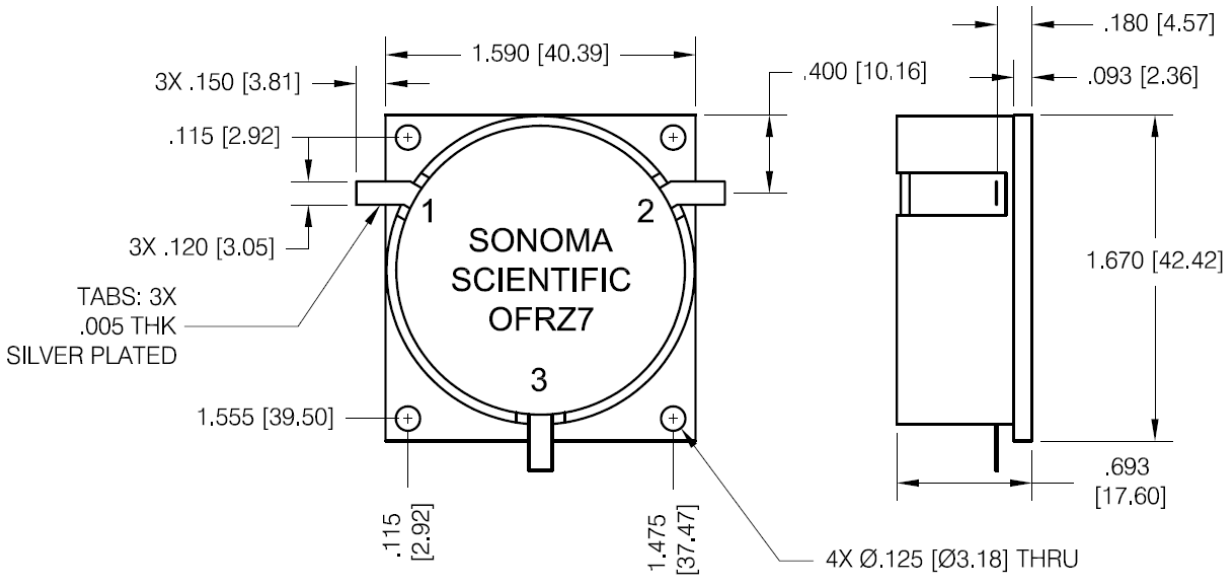

Electrical Specifications	
Frequency	1.02 – 1.10 GHz
Insertion Loss (Max)	0.25 dB
Isolation (Min)	23 dB
VSWR (Max)	1.15:1
Forward Power Handling	250 W Avg, 3 kW Pk
Reverse Power Handling	250 W Avg, 3 kW Pk
Operating Temperature	-40 °C to +85 °C
Direction of Rotation	Clockwise

Mechanical Specifications	
Size	1.590" x 1.670" x 0.693"
Connector Type	Tabs
Connector Configuration	Copper
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .02, .xxx ± .010

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA