
C1HK1

1.02 to 1.04 GHz Drop-in Circulator

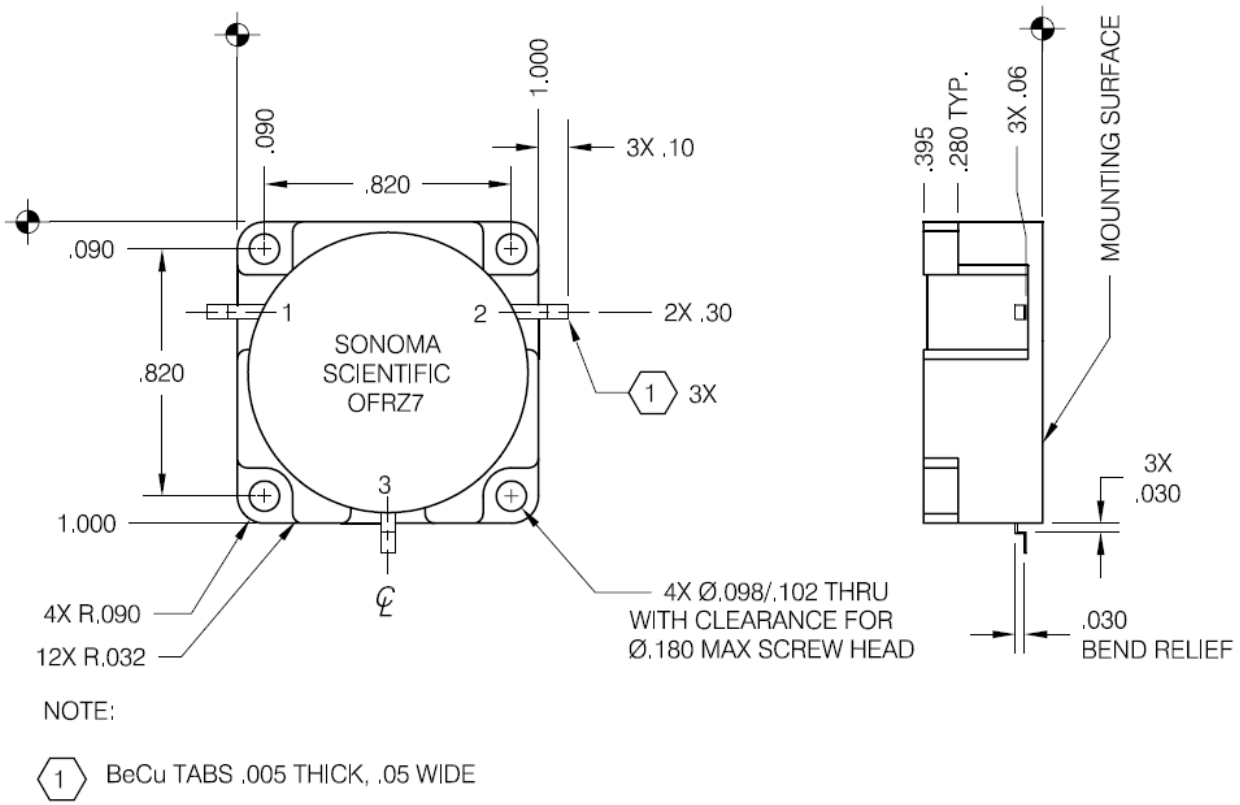

NOTE:

1 BeCu TABS .005 THICK, .05 WIDE

Electrical Specifications	
Frequency	1.02 – 1.04 GHz
Isolation (Min)	20 dB
Insertion Loss (Max)	0.25 dB
VSWR (Max)	1.25:1
Forward Power Handling	266 W Avg, 4000 W Pk
Reverse Power Handling	266 W Avg, 4000 W Pk
Operating Temperature	0 °C to +65 °C
Direction of Rotation	Clockwise

Mechanical Specifications	
Size	1.000 x 1.000 x 0.395 in
Connector Type	Tabs
Connector Configuration	Copper
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .01, .xxx ± .005

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA