
C1EC12

1.03 to 1.09 GHz Drop-in Circulator

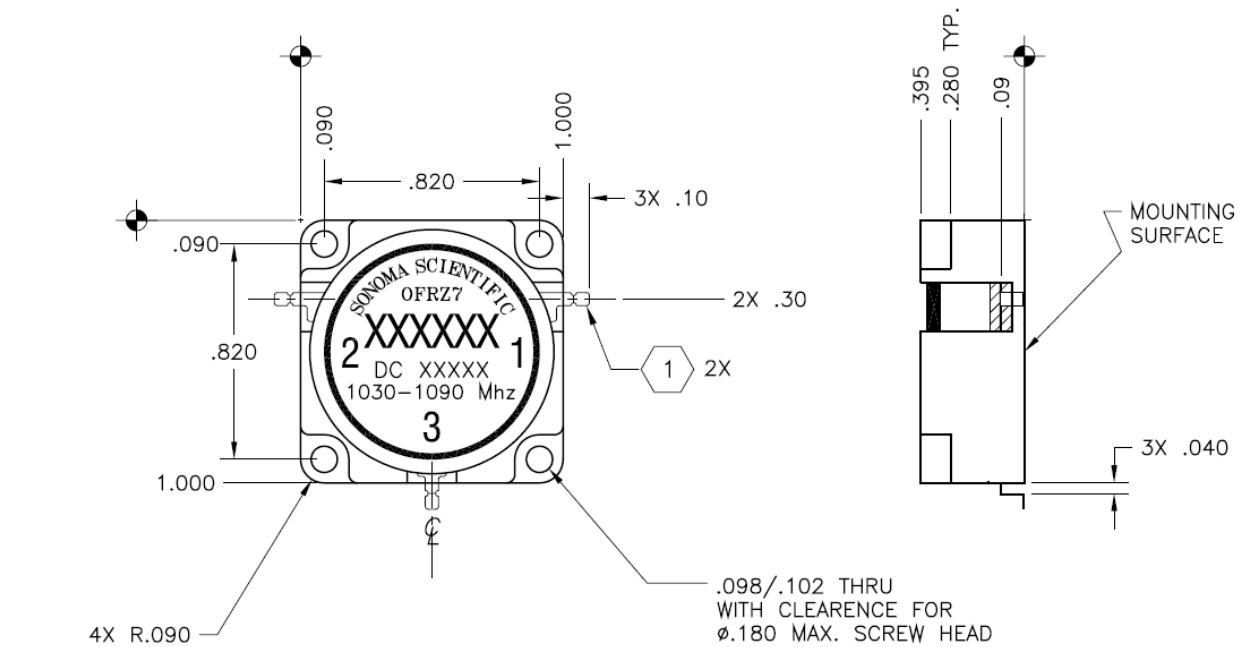

NOTE:

1 BeCu TABS .005 THICK
.05 WIDE

Electrical Specifications	
Frequency	1.03 – 1.09 GHz
Isolation (Min)	20 dB
Insertion Loss (Max)	0.5 dB
VSWR (Max)	1.22:1
Forward Power Handling	5 W Avg, 500 W Pk
Reverse Power Handling	5 W Avg, 500 W Pk
Operating Temperature	-55 °C to +85 °C
Direction of Rotation	Counterclockwise

Mechanical Specifications	
Size	1.000 x 1.000 x 0.395 in
Connector Type	Tabs
Connector Configuration	Copper
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .01, .xxx ± .005

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA