
C1GF3

1.2 to 1.4 GHz Drop-in Circulator

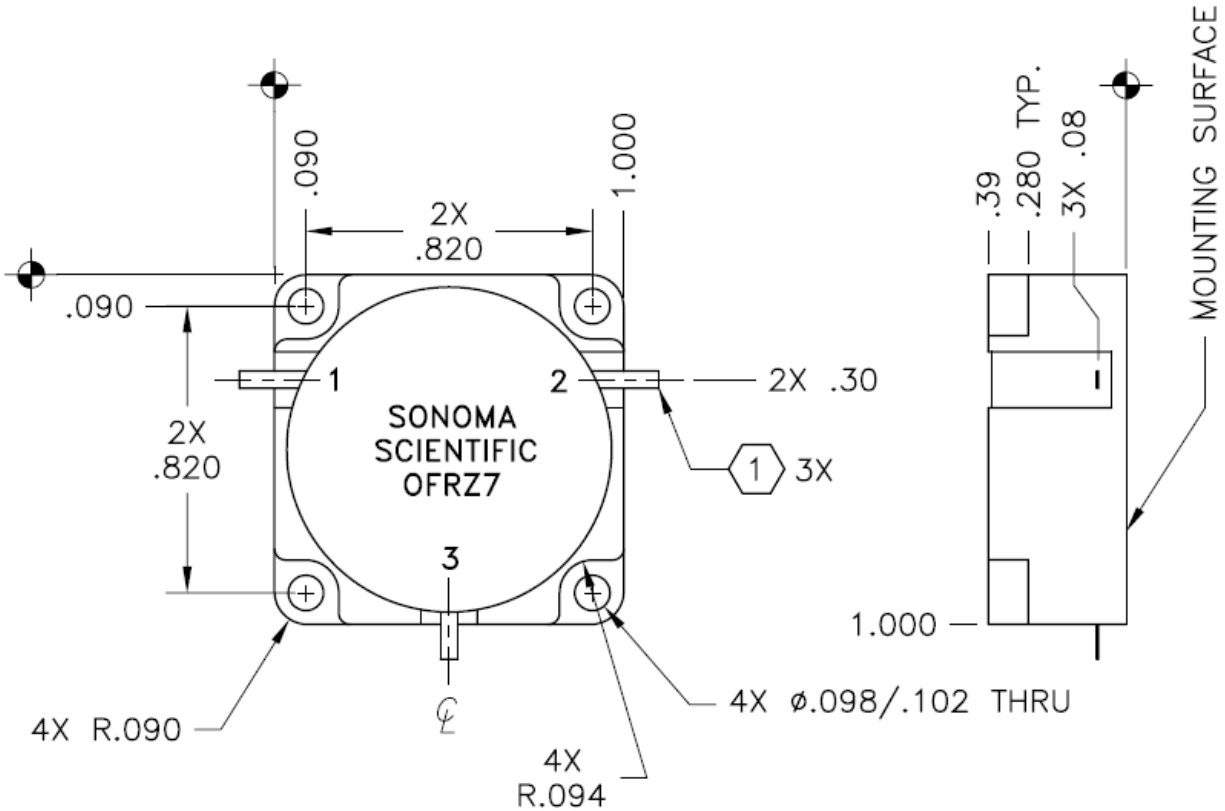

NOTE:

1 BeCu TABS: .10 LONG
0.05 WIDE
0.005 THICK

Unless otherwise specified:
Dimensions are in inches.
.xx ± .01, .xxx ± .005

Electrical Specifications	
Frequency	1.2 – 1.4 GHz
Insertion Loss (Max)	0.4 dB
Isolation (Min)	23 dB
VSWR (Max)	1.22:1
Forward Power Handling	300 W Avg, 3 kW Pk
Reverse Power Handling	300 W Avg, 3 kW Pk
Operating Temperature	0 °C to +55 °C
Direction of Rotation	Clockwise

Mechanical Specifications	
Size	1.000" x 1.000" x 0.390"
Connector Type	Tabs
Connector Configuration	Copper
Material	Steel
Finish	Nickel

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA