
C1HQ2

1.7 to 3.0 GHz Connectorized Circulator

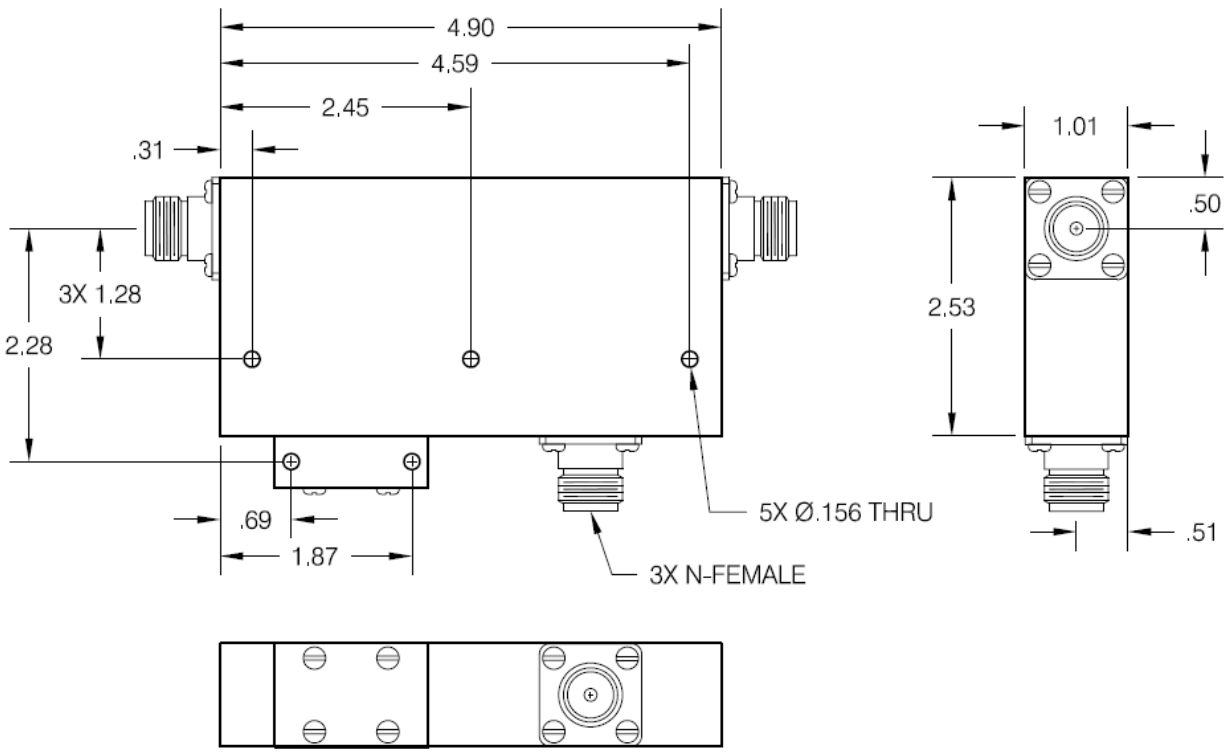

Electrical Specifications	
Frequency	1.7 – 3.0 GHz
Isolation (Min)	42 dB
Insertion Loss (Max)	0.8 dB
VSWR (Max)	1.25:1
Forward Power Handling	200 W
Reverse Power Handling	200 W
Operating Temperature	+25 °C
Direction of Rotation	Clockwise

Mechanical Specifications	
Size	4.90 x 2.53 x 1.01 in
Connector Type	Connectorized
Connector Configuration	NF
Material	Steel
Finish	Nickel

Unless otherwise specified:
Dimensions are in inches.
.xx ± .03, .xxx ± .005

Sonoma Scientific, Inc. • 2236A Park Pl, Minden, NV 89423 • (775) 783-9100
info@sonomascientific.com • www.sonomascientific.com

Made in USA